

DORANI[®]

Wi-Fi App Connection Guide

Step 1 :

Download the **2-Easy** APP

Please See Dorani Touch Installation Manual for Wiring and Installation

The Monitor **MUST** be installed in a location with **GOOD** Wi-Fi signal


Low Wi-Fi signal can cause poor or unstable connections.

Locate the monitor as close to the Wi-Fi router/modem as possible

A Speed of 1.5Mbps **UPLOAD** is recommended **AT THE MONITOR**,

lower speeds may affect quality and reliability.

THE MONITOR WILL TAKE APPROXIMATELY 1 MINUTE TO POWER UP




App Store



Google Play

Step 2 – Connect to the local Wi-Fi / Internet (ON THE MONITOR)

1 - Tap the Screen to reveal ALL Icons as below

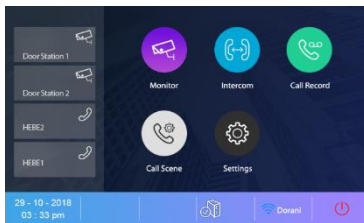

PC Wi-Fi
Symbols


These symbols will appear after you have completed these steps

- 1) Select Settings
- 2) Select 'WIRELESS' from the sub menu
- 3) Enter Password **30613061**
- 4) Select 'Wi-fi Switch' to turn on
- 5) Read and accept the T&C's
- 6) Select 'Wlan Setting'
- 7) Choose your Wi-Fi Network
- 8) Select 'PWD' and enter your Wi-Fi password
- 9) Make sure Auto Connect is ticked
- 10) Press connect button

The System will now connect to your Wi-Fi, this will appear at the bottom of the screen. Use the arrows to return to the home screen, a Tick should also appear next to the PC Symbol at the bottom of the screen next to the


Step 3 – Mobile APP connection (ON YOUR PHONE OR TABLET)

1 : Open the APP

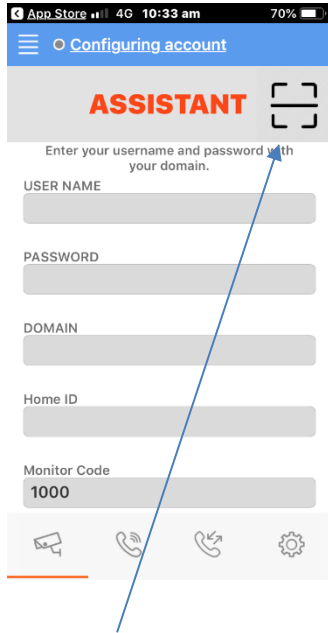

Press the 'scan' button.

2 : Open Wireless settings on the monitor

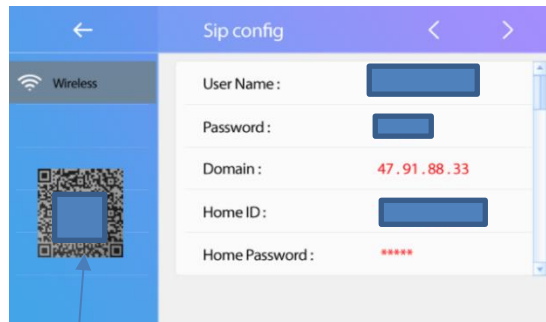


Press the **PC** button (see step 2 picture)

Scan the QR code on the screen with your phone.

IOS - Save

Android – scroll to bottom of screen and **SAVE**

3: Confirm

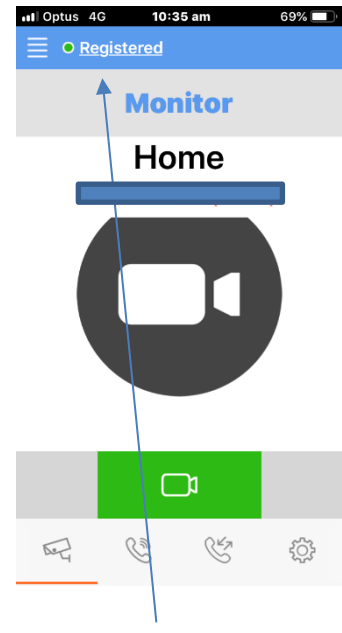

Device should now be registered

****You can access the assistant by pressing the MENU button 4 lines top right of screen) followed by Assistant****

Step 4 – Testing - Setting Divert

The system has 3 different mode operations

- 1) Normal = No Diversion to Mobile Device
- 2) Divert if Not Answered = Divert after time (default 20 Seconds)
- 3) Divert Always =Divert to phone (5 second delay)
- 4) Divert and ring monitor simultaneously (5 second delay)
 - From the Menu, select Settings, select General
 - Press the arrow > up the top right
 - Change 'Screen on in divert' to [Enable]. The intercom will now display on the monitor while initiating a call to your device

Once diversion is set – Place a call to test diversion function

Divert Time – When set for Divert if not answered (currently 20 Seconds) the time can be adjusted before diversion starts

- This intercom can work as a stand-alone intercom, no requirements for WI-FI or mobile app services
- Speeds greater than 1.2Mbps upload are recommended at the monitor for reliability and quality
- Many ISP's restrict activity within supplied routers/modems. An IT specialist may be required to 'unlock' these restrictions. This may fall outside standard installation and Dorani technical support as it is as third-party device
- Dorani bears no responsibility for connection problems caused by 3rd party equipment such as modems, routers and mobile devices
- Warranty does not apply is the connection issues are 3rd party related



Select Call Scene and Desired Function