

DORIP - 01
4MP NETWORK IR
FIXED TURRET CAMERA



KEY FEATURES



DORIP - 01

4MP NETWORK IR FIXED TURRET CAMERA


- 4MP - 2592x1520 Resolution
- 2.8mm Fixed Lens
- SmartIR - up to 30 m IR
- True Day/Night with WDR for all lighting conditions
- Triple Video Streams
- POE & 12V Connectivity
- Multiple network viewing options (web viewer, IOS, android, push notifications)
- Powerful Video Analytics such as Behavior, Exception, Identification and Statistical
- ONVIF Conformance
- IP67 Weather Resistant Housing
- 360 Degree Mounting and Adjustment
- Optional Wall Mount Available
- 2 Year Warranty
- Ultra 265 Video Compression; reduces bandwidth and storage requirements by up to 80% over H.264

SPECIFICATIONS

D O R I P - 0 1					
Sensor	1/3", progressive scan,4.0 megapixel, CMOS				
Lens	2.8mm@F1.8				
DORI Distance	Lens	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
	2.8mm	81	32.4	16.2	8.1
Angle of view(H)	104.4°				
Angle of View (V)	67°				
Angle of View (O)	135.7°				
Adjustment angle	Pan: 0°~360°				
Shutter	Auto/Manual, 1/6~1/100000 s				
Minimum Illumination	Colour: 0.02 Lux (F1.8, AGC ON) 0 Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>52 dB				
IR Range	Up to 30m (98 ft) IR range				
Defog	Digital Defog				
WDR	120dB				
AWB(Auto white balance)	Auto/manual				
Gain Control	Auto/manual				
V I D E O					
Video Compression	Ultra 265,H.265, H.264, MJPEG				
Frame Rate	Main Stream:4MP (2592×1520): Max. 20 fps, 4MP (2560×1440): Max. 25 fps, 3MP (2048×1520): Max. 30 fps; Sub Stream:2MP (1920×1080): Max. 30 fps; Third Stream:D1(720×576) : Max. 30fps				
HLC	Supported				
BLC	Supported				
9:16 Corridor Mode	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 8 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				

S M A R T	
Behavior Detection	Intrusion, cross line, motion detection
Intrusion	Enter and loiter in a pre-defined virtual region
cross line	Cross a pre-defined virtual line
motion detection	Moving within a pre-defined virtual region
Recognition	Face detection
Intelligent Identification	Defocus, Scene Change
Statistical Analysis	People counting
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication
N E T W O R K	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
Compatible Integration	ONVIF(Profile S), API
I N T E R F A C E	
Network	1 RJ45 10M/100M Base-TX Ethernet
G E N E R A L	
Power	12 V DC±25%, PoE (IEEE802.3 af)
	Power consumption: Max 5.5W
Dimensions (Ø x H)	126 x 94 mm (5.0" x 3.7")
Weight	0.33 kg (0.73lb)
Operating Conditions	-35°C ~ +60°C (-31°F ~ 140°F), Humidity:10%~ 95% RH(non-condensing)
Ingress Protection	IP67
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions

D I M E N S I O N S

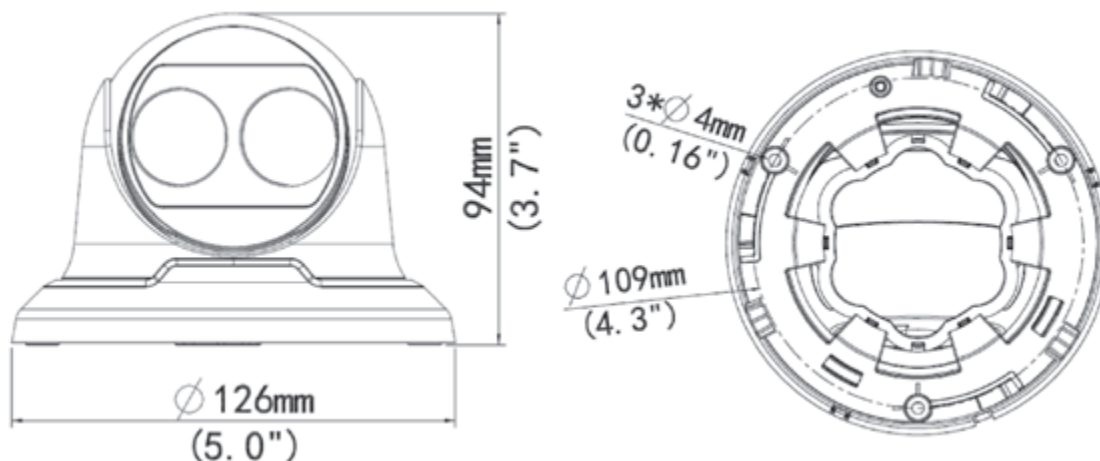

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978