
DORIP - 10
4 CHANNEL 4K NETWORK
VIDEO RECORDER



KEY FEATURES



DORIP - 10

4 CHANNEL 4K NETWORK VIDEO RECORDER


- Support Ultra 265/H.265/H.264 video formats
- Plug and Play with 4 Channel POE Input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- 1 SATA HDD up to 8 TB
- 2TB Surveillance Rated HDD Pre Installed
- P2P Mobile Device Phone Connection IOS & Android

S P E C I F I C A T I O N S

D O R I P - 1 0	
V I D E O / A U D I O I N P U T	
IP Video Input	4-ch
Two-way Audio Input	1-ch, RCA
N E T W O R K	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	64Mbps
Remote Users	128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE
V I D E O / A U D I O O U T P U T	
HDMI/VGA Output	HDMI: 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
	VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	4-ch
Corridor Mode Screen	3/4
D E C O D I N G	
Decoding format	Ultra 265, H.265, H.264
Live view /Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
Capability	1 x 4K@30, 2 x 4MP@30, 4 x 1080p@30
H A R D D I S K	
SATA	1 SATA interface – 2 TB
Capacity	up to 8TB for each disk
S M A R T	
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking
VCA Search	Face search, Behavior search
Statistical Analysis	People counting
E X T E R N A L I N T E R F A C E	
Network Interface	1 RJ-45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel, 2 x USB2.0, Front panel, 1 x USB2.0
Alarm In	4-ch
Alarm Out	1-ch

P O E	
Interface	4 independent 100 Mbps PoE network interfaces
Max Power	Max 30W for single port Max 54W in total (13.5W for each)
Supported Standard	IEEE 802.3at, IEEE 802.3af
G E N E R A L	
Power Supply	48V DC Power Consumption: ≤ 5 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions (W×D×H)	260mm ×240mm × 44mm (10.2" ×9.4" ×1.7")
Weight (without HDD)	≤ 1.12 Kg (2.47 lb)
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions

D I M E N S I O N S

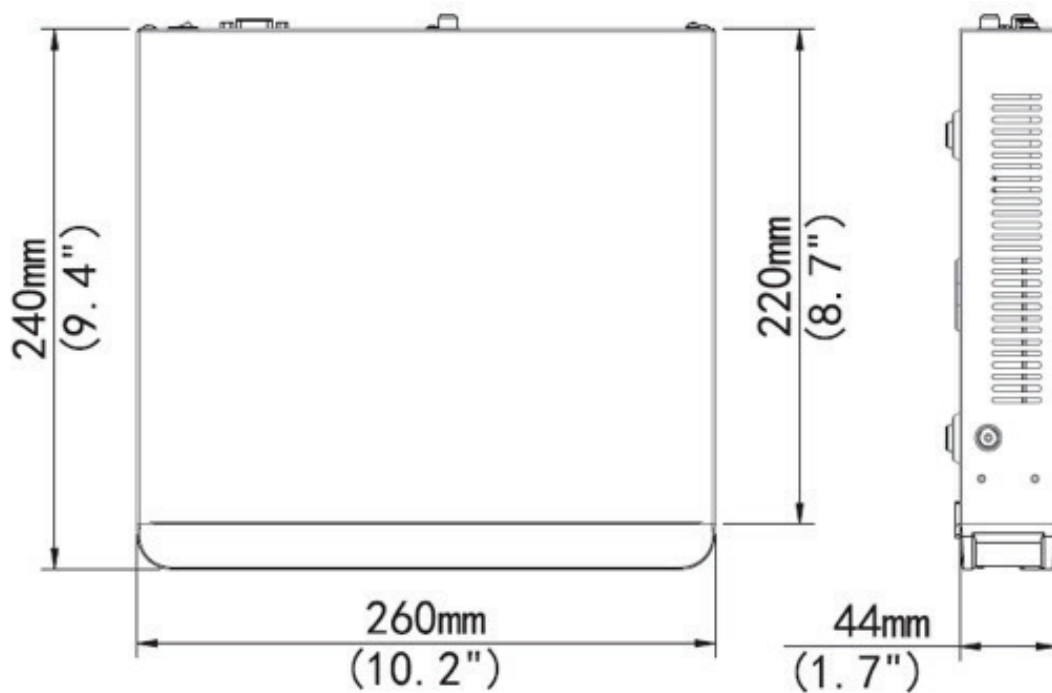

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978