


DORIP-11

8 CHANNEL 4K NETWORK VIDEO RECORDER



KEY FEATURES

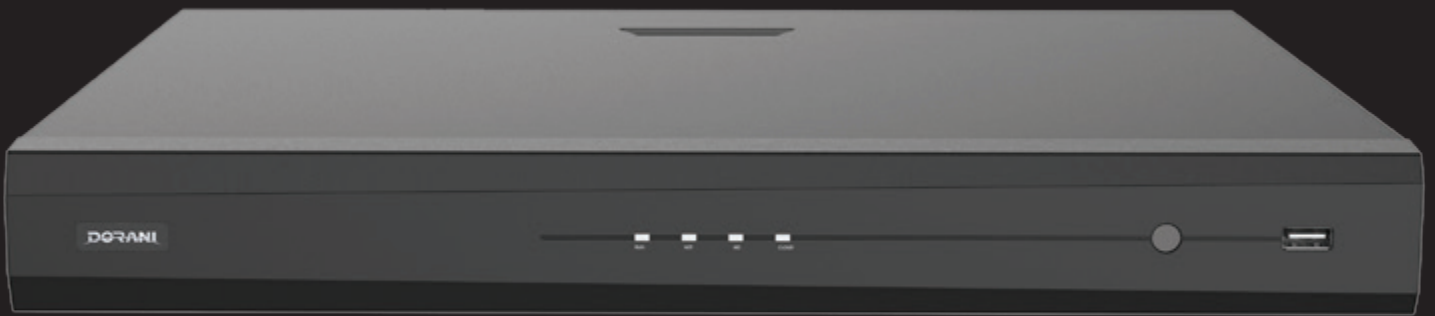

DORIP - 11 8 CHANNEL 4K NETWORK VIDEO RECORDER


- Support Ultra265/H.265/H.264 video formats
- Plug and Play with 8 Channel POE Input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- P2P Mobile Device Phone Connection IOS & Android
- 2 SATA HDDs, up to 8TB for each HDD
- 2TB Surveillance Rated HDD Pre Installed

SPECIFICATIONS

	DORIP-11	DORIP-12
VIDEO / AUDIO INPUT		
IP Video Input	8-ch	16-ch
Two-way Audio Input	1-ch, RCA	
NETWORK		
Incoming Bandwidth	64Mbps	112Mbps
Outgoing Bandwidth	96Mbps	96Mbps
Remote Users	128	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE, SSL, TLS, HTTPS	
VIDEO / AUDIO OUTPUT		
HDMI/VGA Output	VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 HDMI: 4k(3840x2160@30), 4k(3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	8-ch	16-ch
Corridor Mode Screen	3/4/5/7/9	3/4/5/7/9/10/12/16
DECODING		
Decoding format	Ultra265/H.265/H.264	
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1	
HARD DISK		
SATA	2 SATA interfaces	
Capacity	up to 8TB for each disk	
SMART		
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
VCA Search	Face search, Behavior search	
Statistical Analysis	People counting	
EXTERNAL INTERFACE		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0	
Alarm In	4-ch	
Alarm Out	1-ch	

P O E		
Interface	8 independent 100Mbps PoE network interfaces	16 independent 100Mbps PoE network interfaces
Max Power	Max 30W for single port Max 130W in total (16.25W for each)	Max 30W for single port Max 240W in total (15W for each)
Supported Standard	IEEE 802.3af/at	
G E N E R A L		
Power Supply	220V AC Power Consumption: ≤9 W(without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)	
Dimensions(W×D×H)	380mm × 315mm × 49.1mm(15.0" × 12.4" × 1.9")	
Weight (without HDD)	≤2.4kg (5.29 lb)	
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions	

D I M E N S I O N S

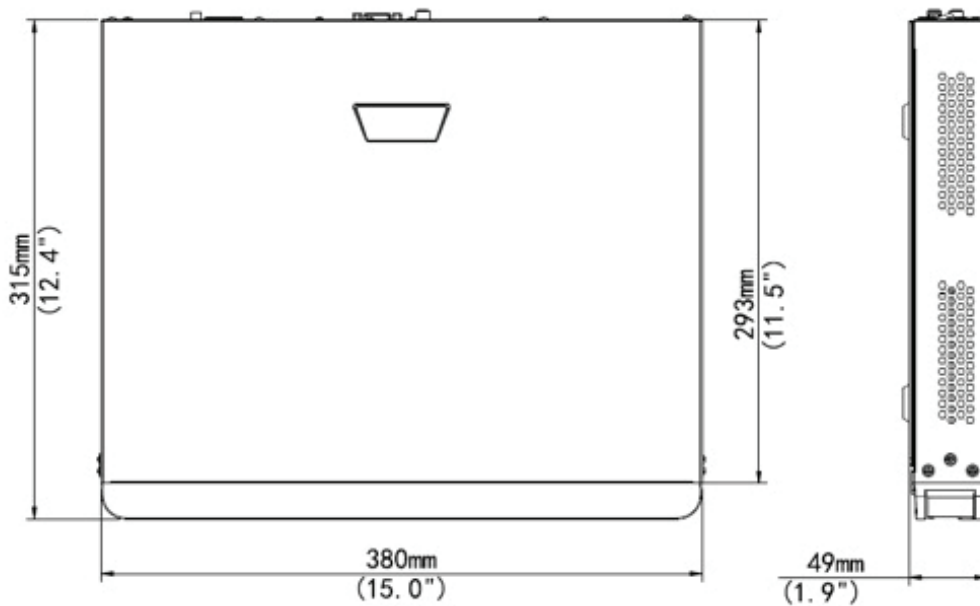

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978