


# DORIP-12

## 16 CHANNEL 4K NETWORK VIDEO RECORDER



# KEY FEATURES

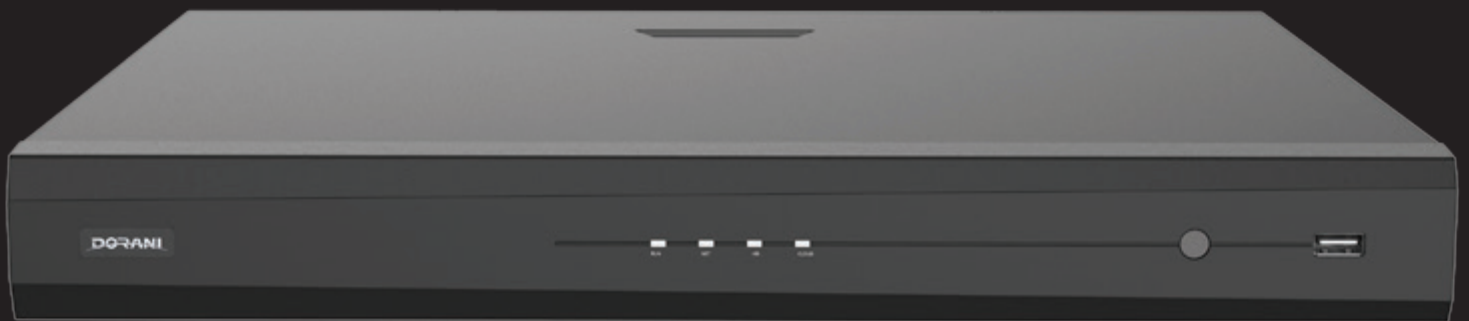

## DORIP - 12

### 16 CHANNEL 4K NETWORK VIDEO RECORDER


- Support Ultra 265/H.265/H.264 video formats
- Plug and Play with 16 Channel POE Input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- 2TB SURVEILLANCE RATED HDD INCLUDED - STANDARD
- P2P Mobile Device Phone Connection IOS & Android

# S P E C I F I C A T I O N S

D O R I P - 1 2		
V I D E O / A U D I O I N P U T		
IP Video Input	8-ch	16-ch
Two-way Audio Input	1-ch, RCA	
N E T W O R K		
Incoming Bandwidth	64Mbps	112Mbps
Outgoing Bandwidth	96Mbps	96Mbps
Remote Users	128	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE,SSL,TLS,HTTPS	
V I D E O / A U D I O O U T P U T		
HDMI/VGA Output	VGA: 1024X768@60,1280X720@60,1280X1024@60,1920X1080@50,1920X1080@60 HDMI: 4k(3840x2160@30),4k(3840x2160@60),1024X768@60,1280X720@60,1280X1024@60,1920X1080@50, 1920X1080@60	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	8-ch	16-ch
Corridor Mode Screen	3/4/5/7/9	3/4/5/7/9/10/12/16
D E C O D I N G		
Decoding format	Ultra265/H.265/H.264	
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30,16 x D1	
H A R D D I S K		
SATA	2 SATA interfaces	
Capacity	up to 8TB for each disk	
S M A R T		
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
VCA Search	Face search, Behavior search	
Statistical Analysis	People counting	
E X T E R N A L I N T E R F A C E		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0	
Alarm In	4-ch	
Alarm Out	1-ch	

P O E		
Interface	8 independent 100Mbps PoE network interfaces	16 independent 100Mbps PoE network interfaces
Max Power	Max 30W for single port Max 130W in total ( 16.25W for each )	Max 30W for single port Max 240W in total ( 15W for each )
Supported Standard	IEEE 802.3af/at	
G E N E R A L		
Power Supply	220V AC Power Consumption: ≤9 W( without HDD )	
Working Environment	-10°C ~ + 55°C ( +14°F ~ +131°F ), Humidity ≤ 90% RH(non-condensing)	
Dimensions(W×D×H)	380mm × 315mm × 49.1mm(15.0" × 12.4" × 1.9" )	
Weight ( without HDD )	≤2.4kg (5.29 lb)	
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions	

## D I M E N S I O N S

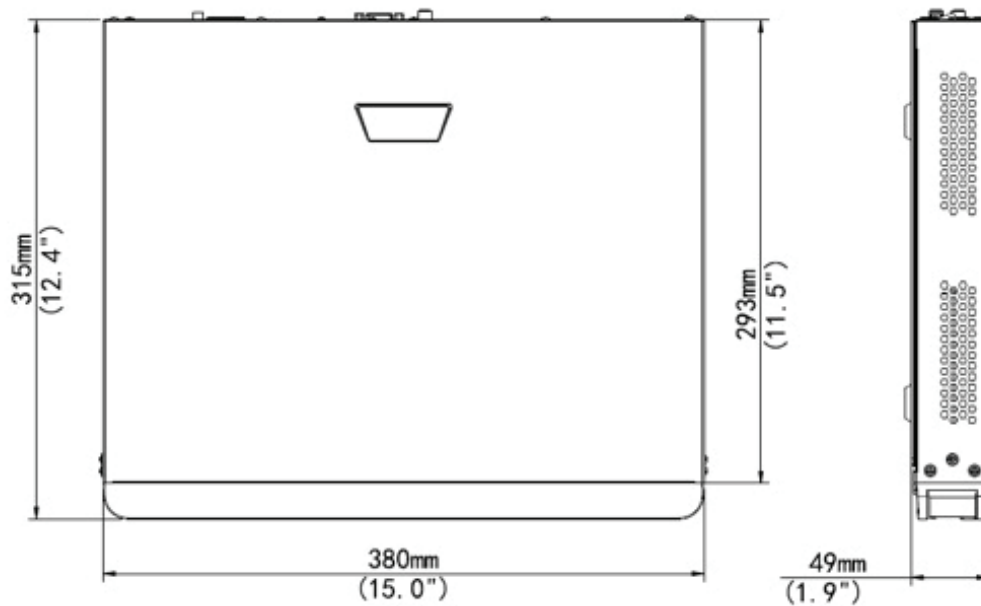

### Dorani Pty Ltd – Security Systems

#### Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

**Email:** reception@dorani.com.au

**Web:** www.dorani.com.au

**Phone:** 03 9357 0942

#### Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

**Email:** info@premiercleanqld.com.au

**Web:** www.premierclean.com.au

**Phone:** 07 3382 6978