

DORANI - 14

64 CHANNEL 4K NETWORK VIDEO RECORDER



KEY FEATURES



DORIP - 14

64 CHANNEL 4K NETWORK VIDEO RECORDER

- Support Ultra H.265/H.265/H.264 video formats
- 16/32/64-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- HDMI1/VGA and HDMI2 independent outputs provided
- Up to 12 Megapixels resolution recording
- Support RAID 0, 1, 5, 6, 10
- 8 SATA HDDs, Up to 10TB for each HDD
- Various fisheye dewarping modes for live view and playback for both web interface and GUI
- Support N+1 Hot spare
- Support for 12V Power output
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


S P E C I F I C A T I O N S

D O R I P - 1 4			
Model	NVR308-16E-B	NVR308-32E-B	NVR308-64E-B
V I D E O / A U D I O I N P U T			
IP Video Input	16-ch	32-ch	64-ch
Two-way Audio Input	1-ch, RCA		
N E T W O R K			
Incoming Bandwidth	160Mbps	320Mbps	
Outgoing Bandwidth	320Mbps		
Remote Users	128		
Protocols	P2P, UPnP, NTP, DHCP, PPPoE		
V I D E O / A U D I O O U T P U T			
HDMI/VGA Output	HDMI1/VGA: 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
	HDMI2: 4K (3840x2160) /60Hz, 4K (3840x2160) /30Hz, 1920x1080p /60Hz, 1920x1080p /50Hz, 1600x1200 /60Hz, 1280x1024 /60Hz, 1280x720 /60Hz, 1024x768 /60Hz		
CVBS Output	1-ch, BNC		
Recording Resolution	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback	16-ch		
Corridor Mode Screen	3/4/5/7/9/10/12/16	3/4/5/7/9/10/12/16/32	
D E C O D I N G			
Decoding format	Ultra 265, H.265, H.264		
Live view/Playback	12MP/8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	3 x 12MP@25, 4 x 4K@30, 8 x 4MP@30, 16 x 1080P@30, 32 x 960P@25, 36 x 720P@30, 64 x D1		
H A R D D I S K			
SATA	8 SATA interfaces		
Capacity	up to 10TB for each HDD		
eSATA	1 eSATA interface		
S M A R T			
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking		
VCA Search	Face search, Behavior search		
Statistical Analysis	People counting		
D I S K A R R A Y			
Array Type	RAID 0, 1, 5, 6, 10		
E X T E R N A L I N T E R F A C E			
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interfaces		
Serial Interface	1 x RS232, 1 x RS485		
USB Interface	Front panel: 2 x USB2.0,Rear panel: 1 x USB3.0		
Alarm In	16-ch		
Alarm Out	4-ch		


GENERAL

Power Supply	100 ~ 240 VAC Power Consumption: ≤ 20 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	442mm ×425mm× 86mm (17.4" × 16.7"× 3.4")
Weight (without HDD)	≤ 5.13 Kg (11.31 lb)
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions

DIMENSIONS

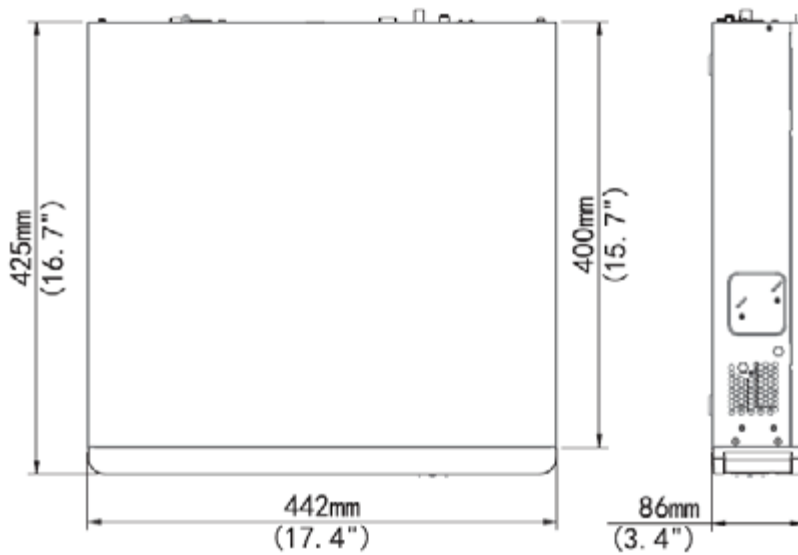

REAR PANEL

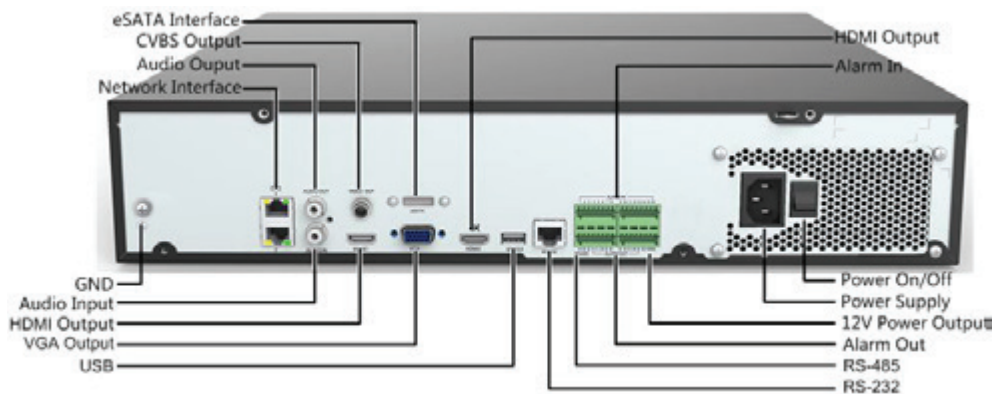

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978