

DORIP - 02

4MP WDR MOTORISED
TURRET IP CAMERA



DORANI[®]
IP CCTV SURVEILLANCE SYSTEMS

KEY FEATURES



DORIP - 02

4MP WDR MOTORISED TURRET IP CAMERA


- 4MP - 2592x1520 Resolution
- 2.8-12mm Motorised Zoom Autofocus Lens
- SmartIR - up to 30 m IR
- True Day/Night with WDR for all lighting conditions
- Triple Video Streams
- In-Built Microphone
- POE & 12V Connectivity
- Multiple network viewing options (web viewer, IOS, android, push notifications)
- Powerful Video Analytics such as Behavior, Exception, Identification and Statistical
- ONVIF Conformance
- IP67 Weather Resistant Housing
- 360 Degree Mounting and Adjustment
- Optional Wall Mount Available
- 3 Year Warranty
- Ultra 265 Video Compression; reduces bandwidth and storage requirements by up to 80% over H.264
- On-board storage capable with Micro SD Card

S P E C I F I C A T I O N S

D O R I P - 0 2					
Sensor	1/3", progressive scan, 4.0 megapixel, CMOS				
Lens	2.8~12 mm,AF automatic focusing and motorized zoom lens				
DORI Distance	Lens	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
	2.8mm	63	25.2	12.6	6.3
	12mm	270	108	54	27
Angle of view(H)	91.0°~27°				
Angle of View (V)	54.4°~13.7°				
Angle of View (O)	118.3°~33.2°				
Adjustment angle	Pan: 0°~360°	Tilt: 0°~90°		Rotate: 0°~360°	
Shutter	Auto/Manual, 1/6~1/100000 s				
Minimum Illumination	Colour: 0.01 Lux (F1.4, AGC ON) 0 Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>52dB				
IR Range	Up to 30m (98 ft) IR range				
Defog	Digital Defog				
WDR	120dB				
V I D E O					
Video Compression	Ultra 265,H.265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream:4MP (2592×1520): Max. 20 fps, 4MP (2560×1440): Max. 25 fps, 3MP (2048×1520): Max. 30 fps; Sub Stream:2MP (1920×1080): Max. 30 fps; Third Stream:D1(720×576) : Max. 30fps				
HLC	Supported				
BLC	Supported				
9:16 Corridor Mode	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 8 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				
S M A R T					
Behavior Detection	Intrusion, cross line, motion detection				
Intrusion	Enter and loiter in a pre-defined virtual region				
cross line	Cross a pre-defined virtual line				
motion detection	Moving within a pre-defined virtual region				
Recognition	Face detection, Audio detection				
Intelligent Identification	Defocus, Scene Change				
Statistical Analysis	People counting				
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication				

AUDIO	
Audio Compression	G.711
Suppression	Supported
Sampling Rate	8 KHZ
STORAGE	
Edge Storage	Micro SD, up to 128 GB
Network Storage	ANR
NETWORK	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
Compatible Integration	ONVIF(Profile S, Profile G), API
INTERFACE	
Built-in Mic	Supported
Network	1 RJ45 10M/100M Base-TX Ethernet
GENERAL	
Power	12 V DC±25%, PoE (IEEE802.3 af)
	Power consumption: Max 8.16W
Dimensions (Ø x H)	Ø129 x 110 mm (Ø5.08" x 4.3")
Weight	0.67 kg (1.48lb)
Working Environment	-40°C ~ +60°C (-40°F ~ 140°F), Humidity:10%~95% RH(non-condensing)
Ingress Protection	IP67
Reset Button	Supported
Warranty	3 Years as per Dorani Pty Ltd Standard Terms and Conditions

DIMENSIONS

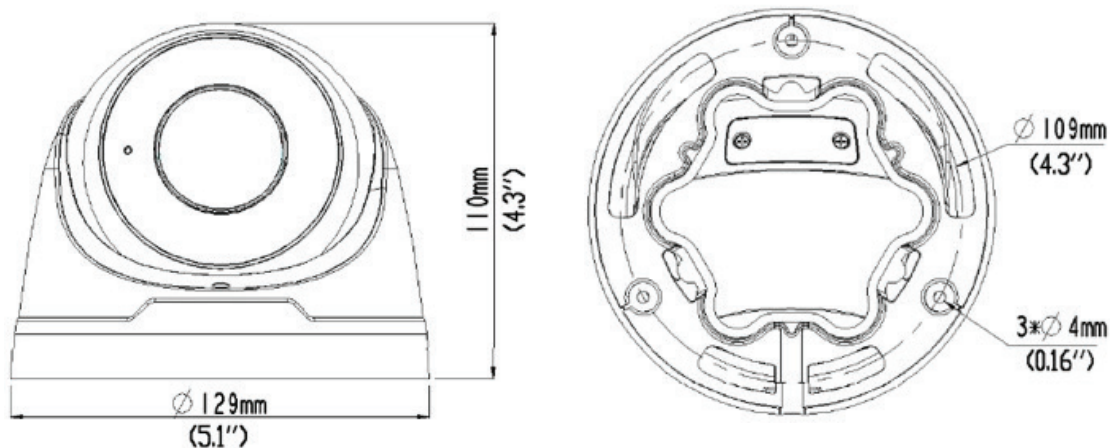

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978