

DORIP - 06

6MP WDR STARLIGHT
FIXED TURRET CAMERA
w/ HUMAN BODY
DETECTION SMART
FEATURES

AVAILABLE IN BLACK or WHITE



KEY FEATURES



DORIP - 06

AVAILABLE IN BLACK or WHITE

6MP WDR STARLIGHT FIXED TURRET CAMERA w/ AUDIO


- 6MP - 3072x2048 Resolution
- Starlight Illumination – Colour in Low Light >0.003 Lux
- In-Built Microphone
- SmartIR - up to 30 m IR
- True Day/Night with WDR for all lighting conditions
- POE & 12V Connectivity
- Multiple network viewing options (web viewer, IOS, android, push notifications)
- Onboard SD card slot
- Powerful Video Analytics with line and intrusion based on human body detection
- ONVIF Conformance
- IP67 Weather Resistant Housing
- 360 Degree Mounting and Adjustment
- Optional Wall Mount Available
- 3 Year Warranty
- Ultra 265 Video Compression; reduces bandwidth and storage requirements by up to 80% over H.264
- 2.8mm fixed lens

S P E C I F I C A T I O N S

D O R I P - 0 6 B L A C K o r W H I T E					
Sensor	1/2.7", 6.0 megapixel, progressive scan, CMOS				
Lens	2.8mm@F1.6				
DORI Distance	Lens	Detect(m)	Observe(m)	Recognize(m)	Identify(m)
	2.8mm	63	25.2	12.6	6.3
Angle of view(H)	112.9°				
Angle of View (V)	59.1				
Angle of View (O)	121.2				
Adjustment angle	Pan: 0°~360°				
Shutter	Auto/Manual, 1/6~1/100000 s				
Minimum Illumination	Colour: 0.003Lux (F1.6, AGC ON)				
	0 Lux with IR				
Day/Night	IR-cut filter with auto switch (ICR)				
Digital noise reduction	2D/3D DNR				
S/N	>56 dB				
IR Range	Up to 30m IR range				
Defog	Digital Defog				
WDR	120dB				
V I D E O					
Video Compression	Ultra 265,H.265, H.264, MJPEG				
H.264 code profile	Baseline profile, Main Profile, High Profile				
Frame Rate	Main Stream: 6MP(3072*2048), Max 25fps; 5MP (2880*1620), Max 25fps; 4MP (2560*1440), Max 25fps; 3MP (2304*1296), Max 30fps; 1080P (1920*1080), Max 30fps; Sub Stream: 720P (1280*720), Max 30fps; D1 (720*576), Max 30fps; 640*360,Max 30fps; 2CIF(704*288), Max 30fps; CIF(352*288), Max 30fps;				
HLC	Supported				
BLC	Supported				
9:16 Corridor Mode	Supported				
OSD	Up to 8 OSDs				
Privacy Mask	Up to 8 areas				
ROI	Up to 8 areas				
Motion Detection	Up to 4 areas				
S M A R T					
Behavior Detection	Intrusion and cross line based on HUMAN BODY DETECTION ONLY, motion detection				
Intrusion	Enter and loiter in a pre-defined virtual region, based on human body detection				
cross line	Cross a pre-defined virtual line, based on human body detection				
motion detection	Moving within a pre-defined virtual region				
Recognition	Audio detection				
Statistical Analysis	na				
General Function	Watermark, IP Address Filtering, Tampering Alarm, Access Policy, ARP Protection, RTSP Authentication, User Authentication				
Edge Storage	Micro SD Card, Up to 128GB				
Network Storage	ANR, NAS(NFS)				

AUDIO	
Audio Compression	G.711
Suppression	Supported
Sampling Rate	8 KHZ
NETWORK	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP
Compatible Integration	ONVIF(Profile S), API
INTERFACE	
Network	1 RJ45 10M/100M Base-TX Ethernet
Built-in Mic	Supported
GENERAL	
Power	12 V DC±25%, PoE (IEEE802.3 af)
	Power consumption: Max 8.9W
Dimensions (Ø x H)	126 x 94 mm (Ø5.0" x 3.7")
Weight	0.41 kg(0.90 lb)
Operating Conditions	-30°C ~ +60°C (-22°F ~ 140°F), Humidity :10%~95% RH(non-condensing)
Ingress Protection	IP67
Warranty	3 Years as per Dorani Pty Ltd Standard Terms and Conditions

DIMENSIONS

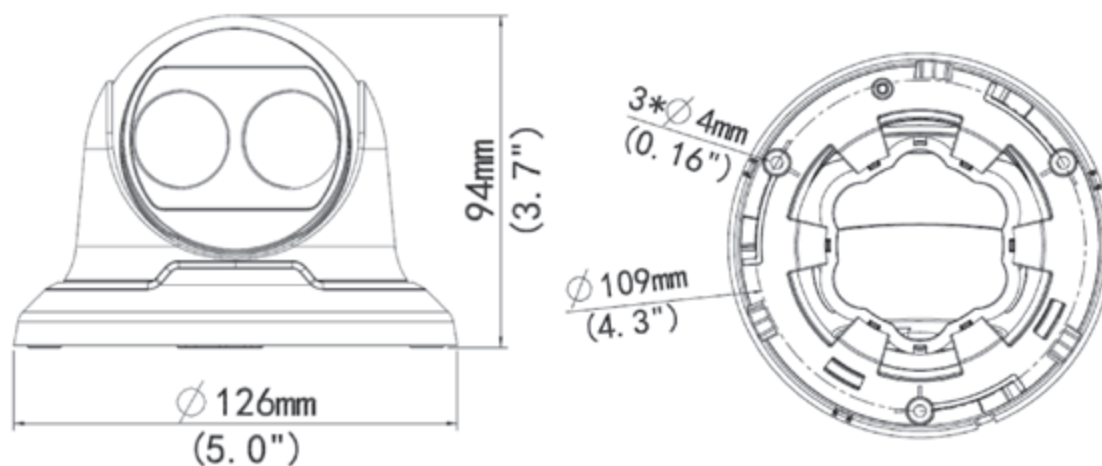

Dorani Pty Ltd – Security Systems

Victoria

4/1 Merri Concourse, Campbellfield VIC 3061

Email: reception@dorani.com.au

Web: www.dorani.com.au

Phone: 03 9357 0942

Queensland

Factory 1/13 Commerce Circuit, Yatala, Qld Australia 4207

Email: info@premiercleanqld.com.au

Web: www.premierclean.com.au

Phone: 07 3382 6978