



DORANI C10
IP APARTMENT VIDEO INTERCOM
USER GUIDE




WWW.DORANI.COM.AU

Dorani (PJM Sales) – 03 9357 0942

4/1 Merri Concourse, Campbellfield, Victoria 3061

KNOW YOUR MONITOR

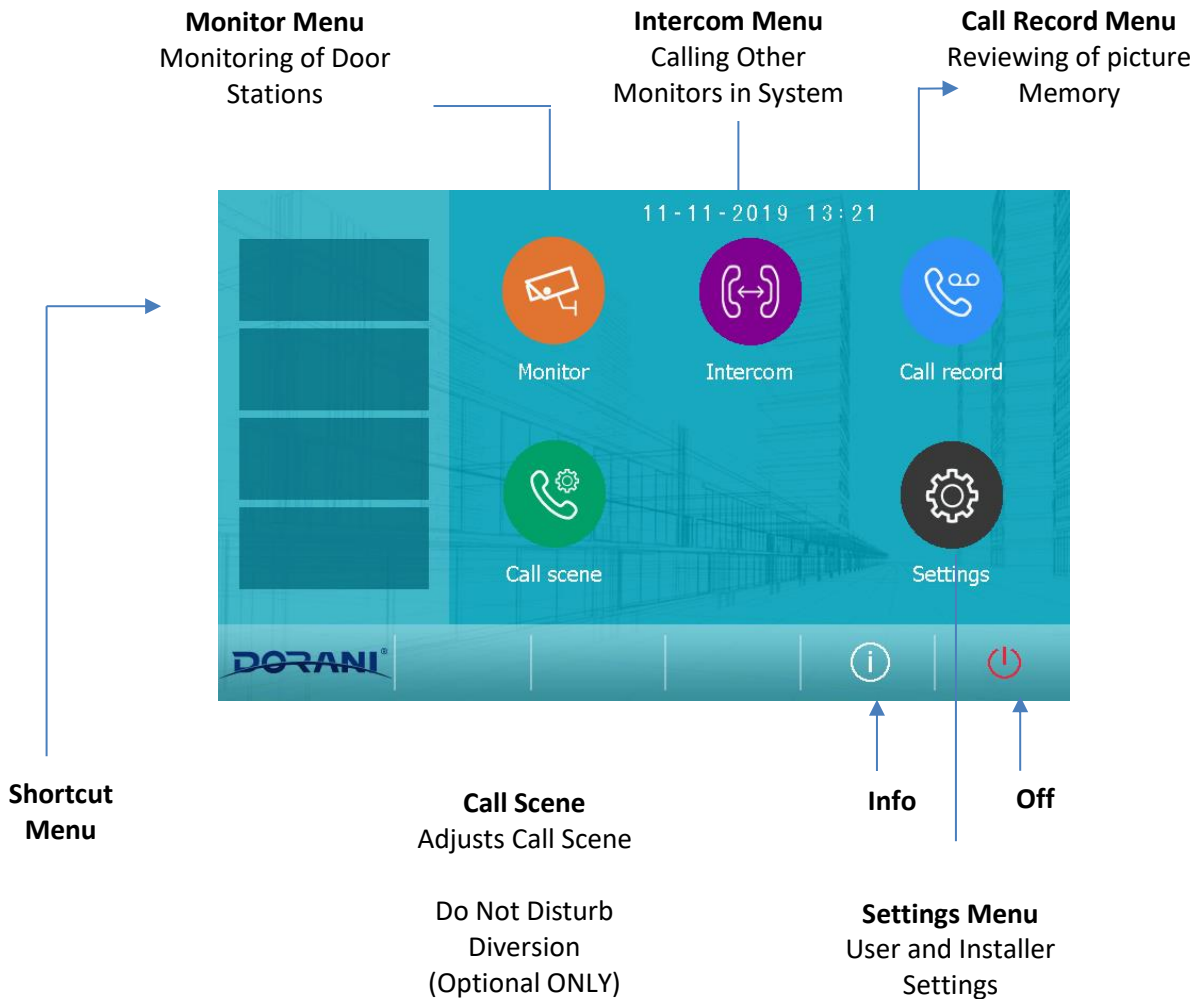

Monitor

This enables the monitoring of the door station, pressing Monitor and selecting a door station will bring up the door stations image.

Intercom

This feature allows you to call different monitors within the same Apartment/House OR other apartments within the building

Call Record

The monitor takes a snapshot of each call and records up to 40 images in the memory of the monitor. You can review your calls in this menu

Call Scene


Settings within this menu allow you adjust how you would like your monitor to respond to a call.

Settings

User, Installer and Manager level settings
Only restricted settings are available for Users

General Guide

When a Call is Made from the Door Station the intercom will ring and display as below

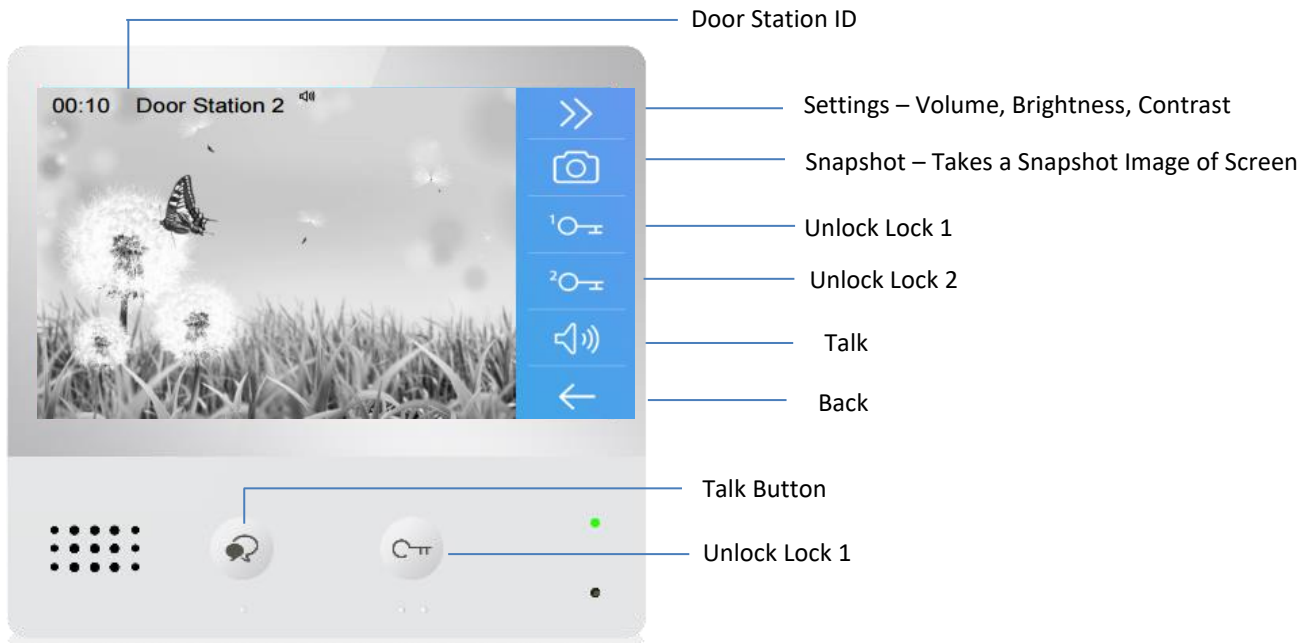

Answer the monitor by using one of the 2 Communication buttons by pressing them ONCE (DO NOT Hold)

Communicate with the visitor in a handsfree manner


If access to be granted – press ONCE one of the Unlock 1 Buttons
The Door station will advise the visitor “Door is Open”

End communication by touching ONCE the communication button


Features whilst in Call

Arrow Settings – Adjust Talk Volume, Colour, Brightness and Contrast

Snapshot – Press this button and the monitor will take a snapshot of the visitor and store it in memory

Unlock 1 – This is to unlock the Door station that the system is calling from
this is a common button with the  Button

Unlock 2 – This is to unlock a secondary lock on the same Door station
Generally NOT used


Talk – This button is for starting and ending communication
This is common with the  Button

Back Button – This takes you back to the Home Page

Settings Menu

Some User end settings are available in the Call Tune and General Settings

Page 1/2/3

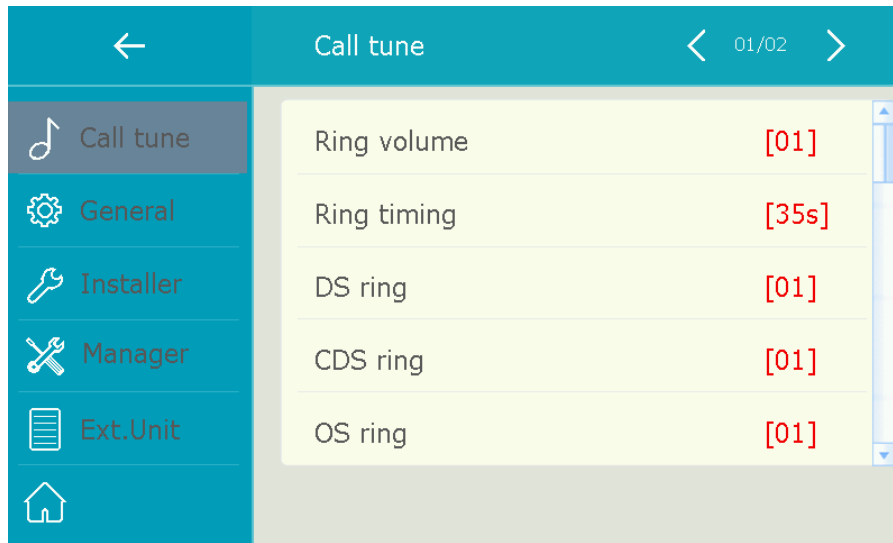

Call Tune

This enable the user to adjust the call volume and call tunes that the monitor plays

General

This adjust General Settings such as Time and Date, Language, SD Card Settings (Optional)

Installer

This is a password protected installer menu, this is ONLY for installation purposes and NOT user end user settings

Manager

This is a password protected manager menu; this is ONLY for installation purposes and NOT user end user settings

NOTE: Any changes to installer or manager menu settings can make your monitor inoperable and cause other significant problems within the entire building intercom and access system.

If these settings are changed by the end user, service charges will be applied for rectification of this.


Door Station



Main Page



Call Page

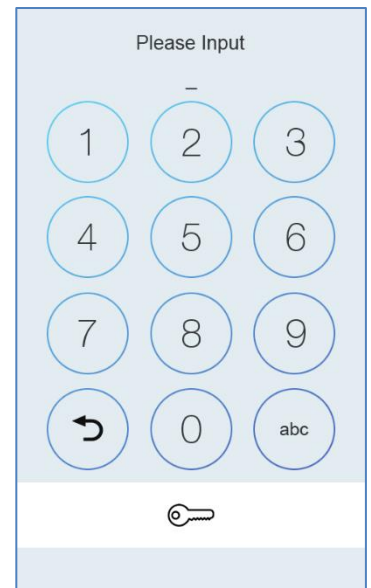

Unlock Page

To Make a Call

TAP the “TOUCH” button on the door station to reveal the Keypad

Type in the desired Unit number and press the CALL button

NOTE: Pressing the RED Delete arrow will delete an incorrect entry; the unit number can be typed again

To Unlock using Code

If Public Password unlocking has been activated at installer level

TAP the “Residents Unlock” button to reveal the Keypad

ENTER the correct 4 Digit passcode to trigger the door to unlock
The Door station will advise the user “Door is Open”

To Unlock using Proximity Tag

If Proximity Tags have been activated at installer level

Presenting a valid proximity tag below the screen will trigger the door to unlock
The Door station will advise the user “Door is Open”

Warranty

All Dorani Video Intercom products come with a limited 12 month warranty from time of initial purchase.

This warranty is covered by Dorani Pty Ltd standard terms and conditions.

Diversion and Mobile device connection warranty and disclaimer is outlined in detail at www.dorani.com.au.

Please read all terms and conditions and disclaimers and if you have any queries, please contact your installer or Dorani Pty Ltd directly in relation to these.

For any service, technical support or warranty items please contact your original installer or local representative for assistance.

Technical Support: support@dorani.com.au



WWW.DORANI.COM.AU

reception@dorani.com.au

Dorani (PJM Sales) – 03 9357 0942
4/1 Merri Concourse, Campbellfield, Victoria 3061